

### Cablehead

#### Application


The cablehead provides a mechanical and electrical connection between braided e-line and the tool string. It is intended as a “weak link” if the tool string becomes stuck in a wellbore. The wireline will pull out of the cablehead in a controlled fashion when predetermined force is applied.

#### Features

- Universal Connection
- “Weak Link” of the Tool String

#### Benefits

The Cablehead has a simple yet reliable design that makes it quick and easy to install.

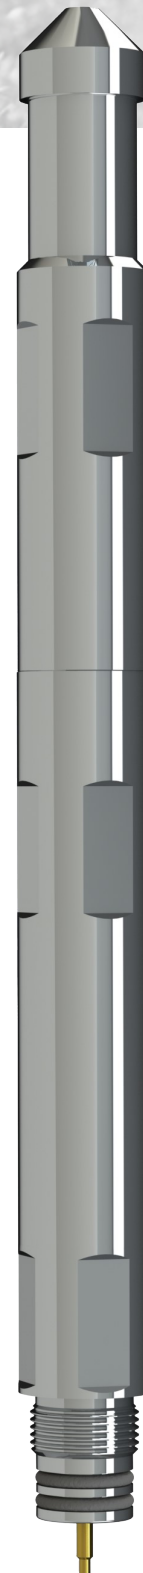

Cablehead		
Size	Type	Part No.
7/32"	Standard Service	AM009WA0002
	H2S Service	AM009WB0002
5/16"	Standard Service	AM009WA0004
	H2S Service	AM009WB0004

Spare Parts and Accessories	
Accessory Type	Part No.
7/32" Cablehead Kit Assembly	AM009UU0007
5/16" Cablehead Kit Assembly	AM009UU0008
Accessories	
Crimping Pliers	PM009UU0058

Specifications	
	Value
Fishneck	1.375" (3.49 cm)
OD	1.438" (3.7 cm)
Length	15.125" (38.4 cm)
Weight	5.5 lb (2.5 kg)
Temperature Rating	350°F (177°C)
Pressure Rating	15,000 psi (103.5 MPa)



**Cablehead**