


Solar Powered Surface Data Collection

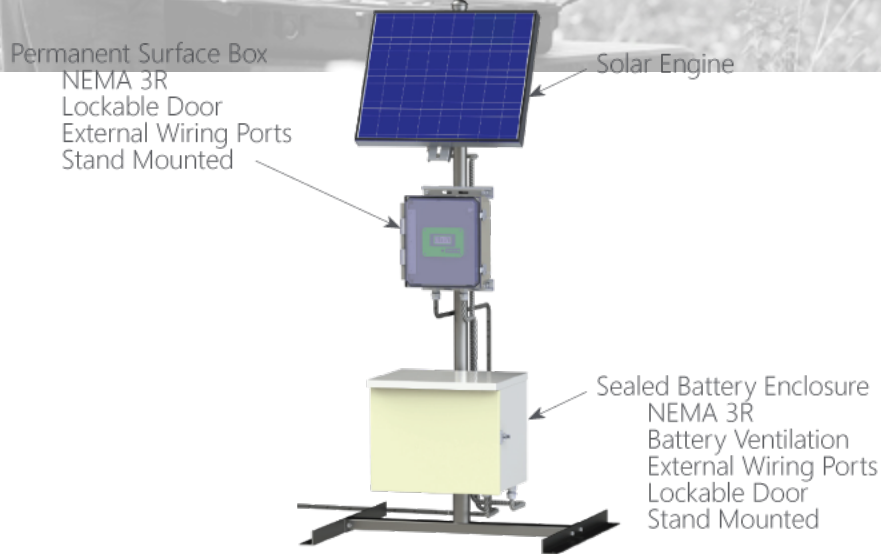

Features

- CSA / UL / CE Zone II Ratable
- Low Power Consumption (<2W)
- Alpha-numeric Display
- Set-up & Download via USB
- 12V DC

Application

DataCan's Solar Powered Surface Data Collection is used when power is otherwise unavailable on site. It can also be used if power is inconsistent (ie there are often power outages) so the solar engine and batteries are used as a backup. DataCan's Solar Powered Surface Data Collection can also be a temporary solution until power becomes available.

Benefits

The Solar Powered Surface Data Collection allows the customer to run their permanent monitoring system when power is unavailable. Solar engine provides clean power; nice even voltage unlike a generator that can have fluctuating voltage.

Accessories	
Description	Part No.
30W Solar Panel	101098
Battery Enclosure	101281
Stand	101477
Wiring Package	102916

Solar Powered Surface Data Collection

Specifications		
Pressure		
Size		30" x 35" x 2"
Power		30 W, 12 VDC, 210 Ahr
Battery Enclosure		
Rating		NEMA 4X
Size		35" x 20" 15"
Power Supply		2 x 12 V Packs