


Features

- ✦ For Extra Long Term Tests
- ✦ One Leak Path
 - Metal to Metal C-Ring
 - Triple O-Ring
- ✦ 200°C Option
- ✦ Modular Memory Cartridge
- ✦ 2 Million Sample Capacity
- ✦ Inconel 718 or MP35N – NACE MR0175
- ✦ Fast Response

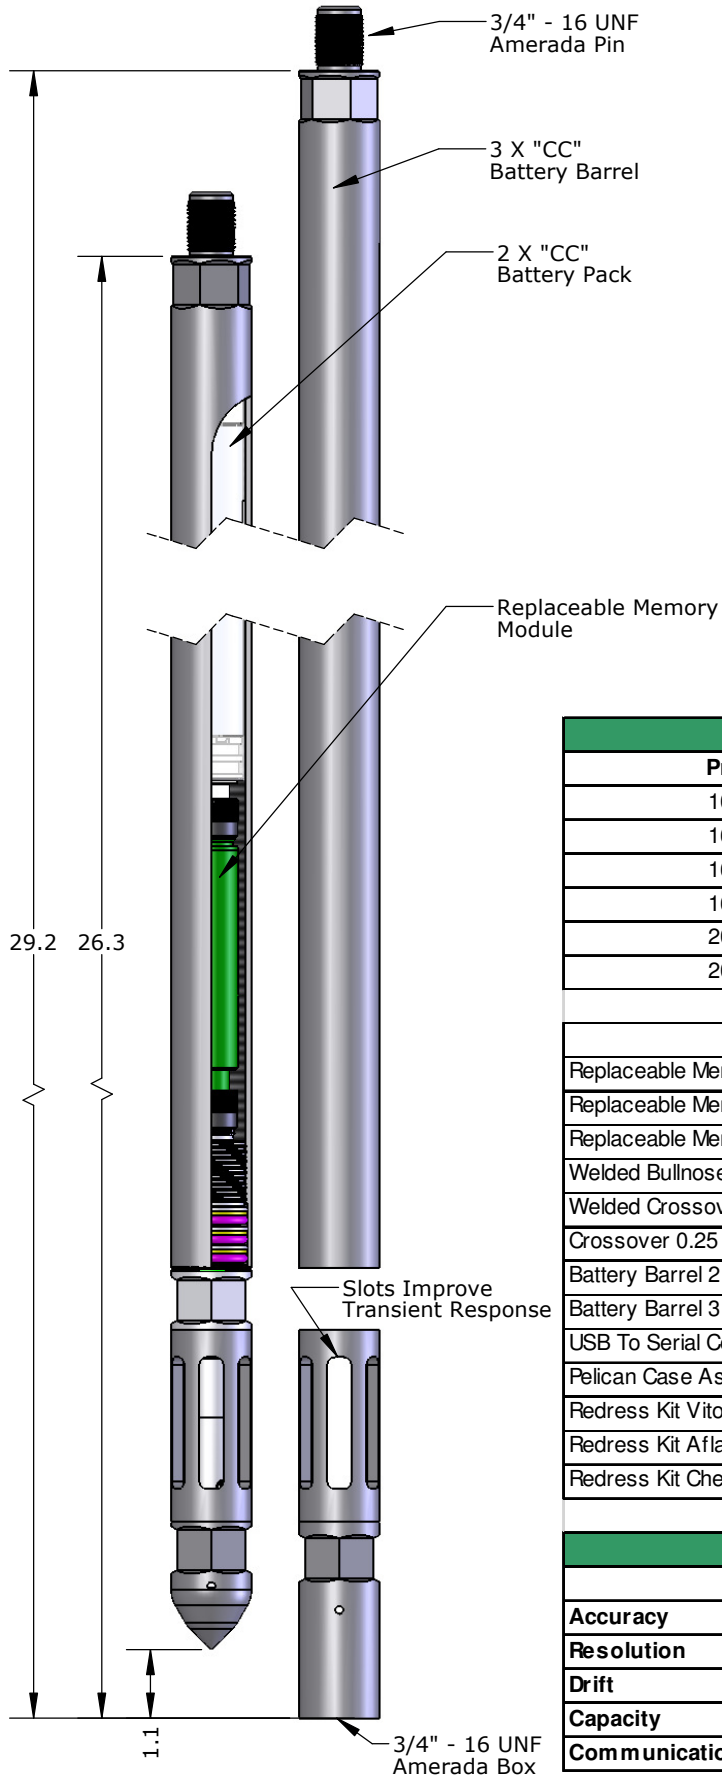

1.25" OD Quartz DXB II Memory Tool - Inconel 718

Pressure	Temperature	Part No.
10,000 psi	150°C	100017
16,000 psi	150°C	101695
16,000 psi	177°C	101696
16,000 psi	200°C	101697
20,000 psi	177°C	101698
20,000 psi	200°C	101699

Accessory Type	Part No.
Replaceable Memory Module LTR 125°C	104960
Replaceable Memory Module LTR 177°C	104657
Replaceable Memory Module LTR 200°C	104833
Welded Bullnose Inconel 718	102321
Welded Crossover 0.75-16 Inconel 718	102323
Crossover 0.25 NPT Inconel 718	100130
Battery Barrel 2 X 'CC' Inconel 718	104145
Battery Barrel 3 X 'CC' Inconel 718	101689
USB To Serial Converter Assembly	100682
Pelican Case Assembly	101686
Redress Kit Viton 90	101693
Redress Kit Aflas	101694
Redress Kit Chemraz	101685

Specifications		
	Pressure	Temperature
Accuracy	0.020% F.S.	0.25°C
Resolution	0.00006% F.S.	0.005°C
Drift	< 3 psi / year	< 0.1°C / year
Capacity	2 Million Samples	
Communication Method	USB	