


Features

- ✦ 8 hours @ 300 °C (600 °F)
- ✦ External Fast Response Temperature Probe
- ✦ Casing Collar Locator
- ✦ Compatible with a Number of Different Flowmeters
- ✦ 0.1s Fast Sample Rate Option
- ✦ Pressure Trigger Option
- ✦ 1.8 Million Sample Capacity
- ✦ Inconel 718 – NACE MR0175

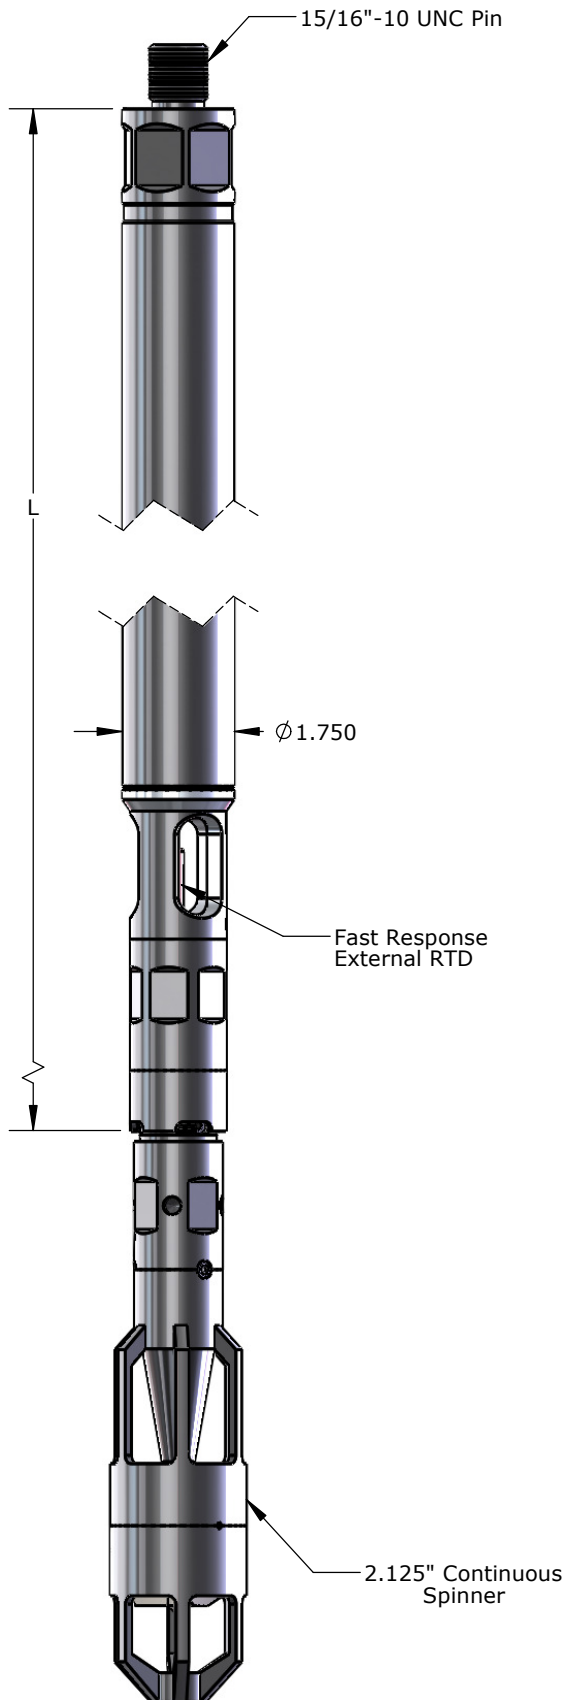

1.75" OD Geothermal PTS-CCL Memory Tool - Inconel 718	
Pressure	Part No.
750 psi	107630
1,500 psi	107631
3,000 psi	107632
6,000 psi	107633
10,000 psi	107634
15,000 psi	107635
20,000 psi	107636

Compatible Spinners			
Spinner Type	Size	Version	Part No.
Fullbore Spinner	5"	Standard Service	AM005WA0002
		H2S Service	AM005WB0002
	7"	Standard Service	AM005WA0008
		H2S Service	AM005WB0008
Continuous Spinner	1.375"	Standard Service	AM005WA0003
		H2S Service	AM005WB0003
	1.688"	Standard Service	AM005WA0004
		H2S Service	AM005WB0004
	2.125"	Standard Service	AM005WA0007
		H2S Service	AM005WB0007

Accessory Type	Part No.
Pelican Case Assembly	107625
Redress Kit Viton 90	107626
Redress Kit AfLas7182B	107627
Redress Kit Chemraz 510	107628

Specifications		
	Pressure	Temperature
Accuracy Up To	0.022% F.S.	0.25 °C
Resolution	0.0003% F.S.	0.001 °C
Drift	< 3 psi / year	< 0.1 °C / year
Casing Collar Locator		
Detector Type	Electromagnetic	
Flowmeter		
Minimum Rotation	30 rpm	
Maximum Rotation	18000 rpm	
Resolution	0.125 rps	
Memory		
Capacity	1.8 Million Samples	
Communication Method	USB	