






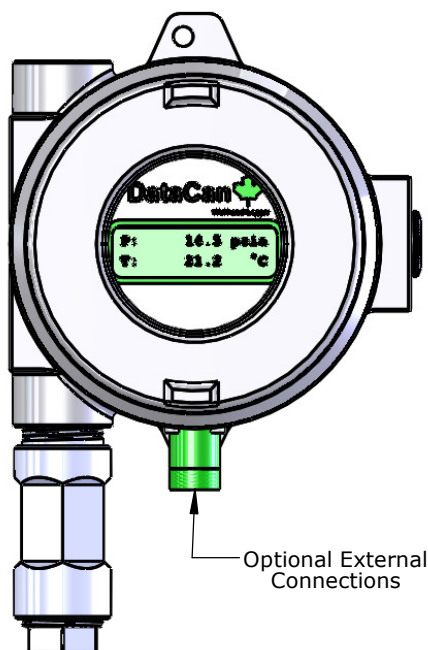


#### Features

-  Extreme Service Reliability
-  High Resolution Measurements
-  1 Million Sample Capacity
-  Explosion Proof Enclosure
-  1/4" High Pressure Connection
-  Programmable with DataCan Software
-  Optional External Download and External Start/Stop



Wellhead Logger			
Pressure	Temperature	Communication	Part No.
5,000 psi	-40 °C to 85 °C	USB Only	104401
10,000 psi			104402
20,000 psi			104403
30,000 psi			104404
5,000 psi		USB & Radio	104405
10,000 psi			104406
20,000 psi			104407
30,000 psi			104408

Wellhead Logger - External Connect			
Pressure	Temperature	Communication	Part No.
10,000 psi	-40 °C to 85 °C	USB Only	105282
20,000 psi			105283
30,000 psi			105284

Accessory Type	Part No.
Pelican Case Assembly	100853
USB Communication Cable	100682
Radio 100m	102044
USB Radio Receiver	101790
Adapter 1/2" NPT	101438
Adapter 3/4" NPT	100849
Adapter Autoclave	100850

Specifications		
	Pressure	Temperature
Accuracy Up To	0.020% F.S.	1.0 °C
Resolution (scales directly with gatetime)	<0.012 psi/sec	<0.005 °C/sec
Drift	Negligible	Negligible
Capacity	1 Million Samples	