


Features

- ✦ CSA Explosion Proof Rated
- ✦ Metal to Metal Seals
- ✦ Welded Glass Feedthru
- ✦ Simple Installation
- ✦ Single or Multi Conductor
- ✦ *15 000 psi
- ✦ 125°C

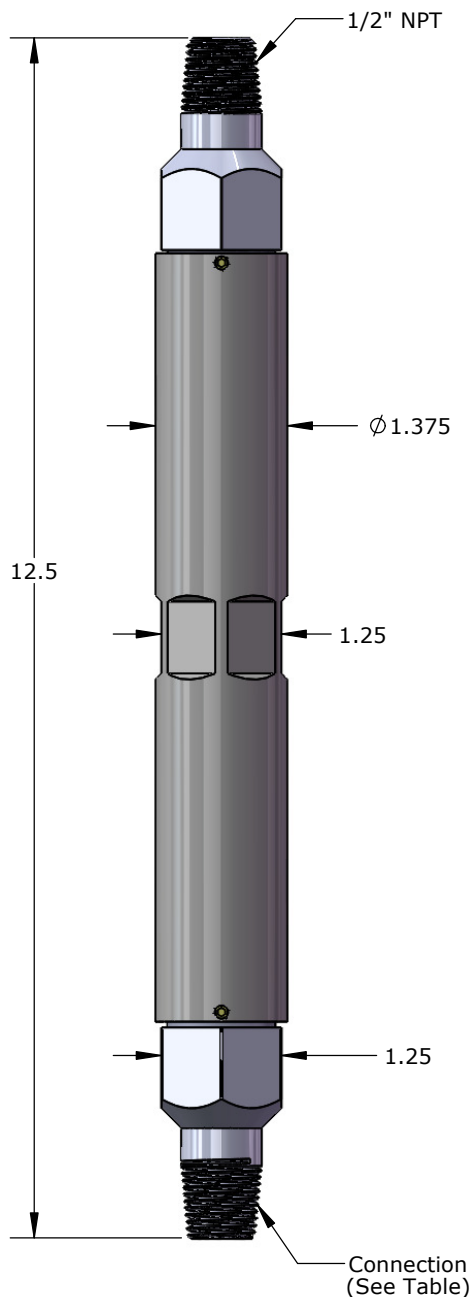

CSA Approved Wellhead Outlet II - *5,000 psi		
Wire Size	Connection	Part No.
1/8" OD	1/2" NPT	102186
1/4" OD	1/2" NPT	102316
1/4" OD	9/16" Autoclave	102648
4mm OD	1/2" NPT	102651

Wellhead Outlet II		
Wire Size	Connection	Part No.
1/8" OD	1/2" NPT	102631
1/4" OD	1/2" NPT	102630
4mm OD	1/2" NPT	101019

Multi Conductor Wellhead Outlet II		
Wire Size	Connection	Part No.
1/8" OD	1/2" NPT	102467
1/4" OD	1/2" NPT	102451
1/4" OD	9/16" Autoclave	102650
4mm OD	1/2" NPT	102653

Accessory Type	Part No.
Surface Wiring Package	102916