

1.25" Piezo III

Application

The 1.25" Piezo III pressure gauge is our workhorse gauge for monitoring offset fractures, build-ups, drawdowns, DFIT's, isolation tests, and simple gradient surveys. The 1.25" diameter barrel allows for the use of "C" cell batteries for extended duration tests.

*Make sure to use the battery calculator in the DataCan download software to determine maximum job length for specific applications.

Benefits


This gauge has a welded piezoresistive sensor and a shock-mounted high-reliability circuit board. The new circuit comes with an 11 million sample capacity and a super low power sleep. This gauge will provide over a year of 30 second sample rate data with a "C" cell battery at 125 °C well temperature.


Features

- 11 Million Sample Capacity
- Welded Pressure Sensor
- Higher Reliability – Shock Mounted Electronics
- Up to 470 Hz Variant Available - Contact DataCan for Part Number
- Inconel 718 – NACE MR0175

1.25" Welded Piezo III - Inconel 718

Pressure	Temperature	Part No.
750 psi	100°C	108150
1,500 psi	120°C	108151
3,000 psi	150°C	108152
6,000 psi		108153
10,000 psi	177°C	108154
15,000 psi		108155
20,000 psi		108156
25,000 psi		108157

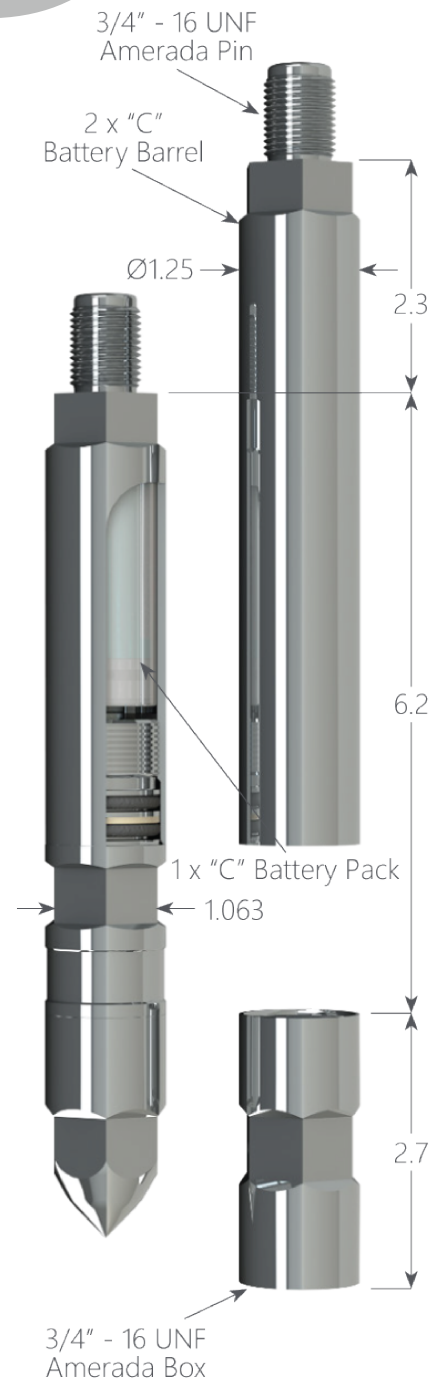



datacan

Accessories

Accessory Type	Part No.
Bullnose SS316	101238
Crossover 0.75-16 UNF SS17-4	101239
Battery Barrel 1 X "C" Inconel 718	100485
Battery Barrel 2 X "C" Inconel 718	100486
Pelican Case Assembly	100501
Extended Pelican Case Assembly	103467
USB Download Cable	100682
Redress Kit Viton 90	100911
Redress Kit Aflas 7182B	101002
Redress Kit Chemraz 510	101003
Battery Tester	100876

Compatible Batteries

Size	Max Temp	Part No.
C	150°C	100671
	165°C	100499
	180°C	100500
1 x CC	150°C	101010
	165°C	100989
	180°C	100814

Specifications

	Pressure	Temperature
Accuracy Up To	0.03 % F.S.	0.5°C
Resolution	0.0003% F.S.	0.005°C
Drift	< 3 psi/year	< 0.1°C/year
Capacity	10 Million Samples	
Communication Method	USB	