

1.25" Quartz II

Application

The 1.25" Quartz DCQ II has the largest internal diameter barrel volume available, which allows for a larger battery to energize the gauge for extra-long term tests. The DCQ II Quartz Gauge was specifically designed for long term gauge hanger applications in extreme environments. 120 days of downhole quartz pressure data in 160°C gas wells. We have long term downhole experience with this tool in Saudi Arabia, the North Sea, and the Eagleford Shale.

*Make sure to use the battery calculator in the DataCan download software to determine maximum job length for specific applications.

Benefits


The extended battery pack and tripple o-ring sealing solution on the DCQ 2 were specifically designed to capture data in long term high-temperature oil and gas wells. The DCQ 2 is our premier extended duration quartz gauge.


Features

- Designed For Extra Long Term Tests
- One Leak Path
- Metal to Metal C-Ring
- Triple O-Ring
- 200°C Option
- 2 Million Sample Capacity
- Inconel 718 or MP35N – NACE MR0175
- Fast Response

1.25" Quartz DXB II - Inconel 718

Pressure	Temperature	Part No.
10,000 psi	150°C	100017
16,000 psi	150°C	101695
16,000 psi	177°C	101696
16,000 psi	200°C	101697
20,000 psi	177°C	101698
20,000 psi	200°C	101699

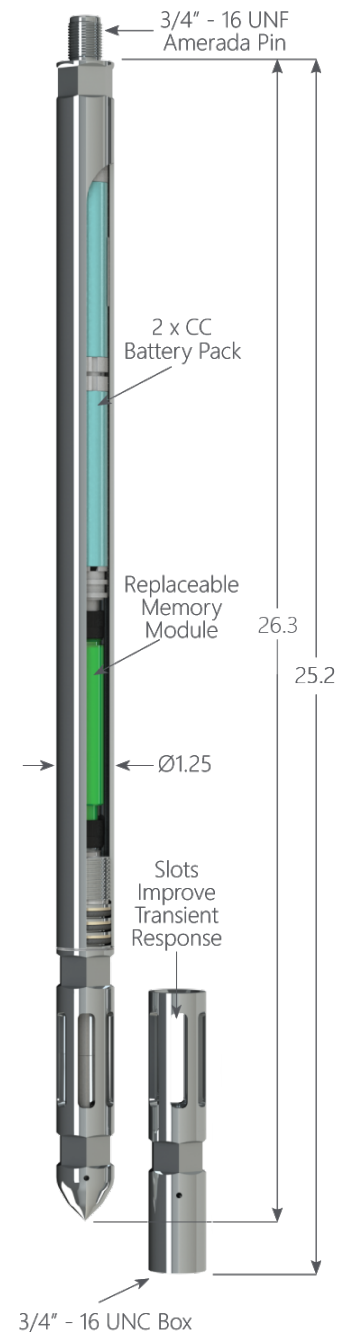

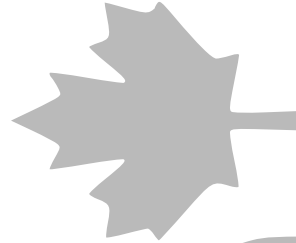

DataCan

Accessories

Accessory Type	Part No.
Replaceable Memory Module LTR 125°C	104960
Replaceable Memory Module LTR 177°C	104657
Replaceable Memory Module LTR 200°C	104833
Welded Bullnose Stainless Steel	102321
Welded Crossover 0.75-16 Stainless Steel	102323
Crossover 0.25 NPT Stainless Steel	100130
Battery Barrel 2 X 'CC' Inconel 718	104145
USB Download Cable	100682
Pelican Case Assembly	101686
Redress Kit Viton 90	101693
Redress Kit Aflas	101694
Redress Kit Chemraz 510	101685
Battery Tester	100876

Compatible Batteries

Size	Max Temp	Part No.
2 x CC	150°C	102780
	165°C	102927
	180°C	102928
	200°C	102929
3 x CC	150°C	102381
	165°C	102937
	180°C	102938
	200°C	102939

Specifications

	Pressure	Temperature
Accuracy Up To	0.02 % F.S.	0.2°C
Resolution	0.00006% F.S.	0.005°C
Drift	≤ 2 psi/year	< 0.1°C/year
Capacity	2 Million Samples	
Communication Method	USB	