


Surface Box

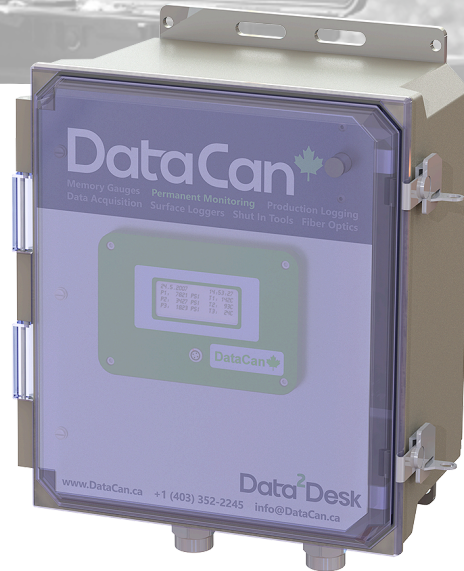

Application

DataCan's Surface Box collects and stores downhole and surface data, and is considered our standard surface box. It has a weatherproof enclosure allowing the customer to use it inside or outside. The Surface Box has digital display, 20 million sample capacity, and Modbus output. DataCan offers a telemetry kit for any additional gauges required. This system is very configurable. Please contact DataCan for your specific application.

Benefits

The Surface Box has low power requirements so it can be run on a single car battery for months or on a small solar panel. Since the Surface Box has lots of storage, the customer does not need to get back to it right away to retrieve the data, which is great for when it is being used in an isolated area. Set-up and data download is quick and easy via a USB connection.

Features

- Digital Display
- 20 Million Sample Capacity
- Set-Up & Download Via USB
- Modbus Output
- Optional Telemetry Cards
- Optional Surface Transmitters Inputs
- Optional RTD Thermocouple Inputs
- Optional 4 to 20 mA Inputs

Surface Box Collection	
Description	Part No.
Logger	105421
Single Gauge Piezo	101227
Multi Gauge Logger	103648

Surface Box

Specifications	
Display	Pressure and Temperature
Memory Capacity	20 Million Samples (1 GB)
Download Via	USB
Output	4-20 mA, RS-485 ModBus
Power	12 - 24 V