

SERO

Solid Carrier

Application


DataCan's Solid Gauge Carrier is customizable to suit the user's needs. The gauge is attached directly to a gauge port with a high-pressure, metal-to-metal testable seal . Configured to measure either internal (tubing) or external (annulus) pressure.

Features

- Non Welded
- Custom
- Metal to Metal Seals
- Pressure Testable

Solid Gauge Carrier Assembly - Multi Gauge Assembly

Tubing	OD	ID	Drift ID	Offset	Weight	Tensile	Collapse	Burst	x	Material	Ported	Part No.
	(inches)		(mm)		(lb/ft)	(lb)	(psi)					
3.5	5.25	2.992	2.867	0.50	9.3	159,090	10,530	10,160	EUE	4140 L80	Yes	108925
88.9	133.4	78.0	72.8	12.7						4130	No	108919
4.5	6.625	3.958	3.833	0.531	12.75	208,730	7,500	8,430	EUE	4140 L80	Yes	108924
114.3	168.3	100.5	97.4	13.5						4130	No	108920

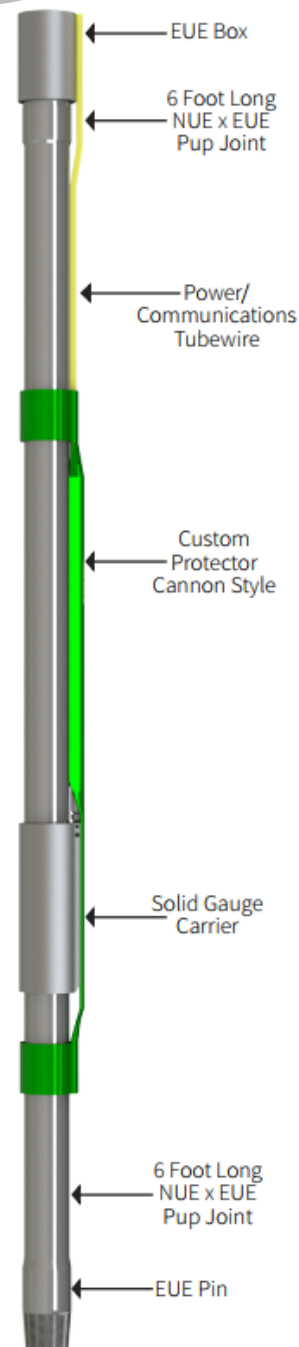

Solid Gauge Carrier Assembly - Single Gauge (All Ported)

Tubing	OD	ID	Drift ID	Offset	Weight	Tensile	Collapse	Burst	x	Material	Part No.
(inches)	(mm)				(lb/ft)	(lb)	(psi)				
2.375 60.3	3.525 89.5	1.869 47.4	1.773 45.0	0.325 8.3	5.95	102,990	15,280	14,970	EUE	4140 L80	100287
										Teflon ID	100288
									EUE Modified	4140 L80	100289
										Teflon ID	100290
2.875 73.0	4.125 104.7	2.441 62.0	2.347 59.6	0.313 8.0	6.5	105,570	11,160	10,570	EUE	4140 L80	100316
										Teflon ID	100317
									EUE Modified	4140 L80	100318
										Teflon ID	100319
3.5 88.9	4.813 122.2	2.992 78.0	2.867 72.8	0.281 7.1	9.3	159,090	10,530	10,160	EUE	4140 L80	100345
										Teflon ID	100346
									EUE Modified	4140 L80	100347
										Teflon ID	100348
4.5 114.3	5.762 146.4	3.958 100.5	3.833 97.4	0.281 7.1	12.75	208,730	7,500	8,430	EUE	4140 L80	100374
										Teflon ID	100375
									EUE Modified	4140 L80	100376
										Teflon ID	100377